


Microwave Sensor LED T8 Tube

Series Type: M

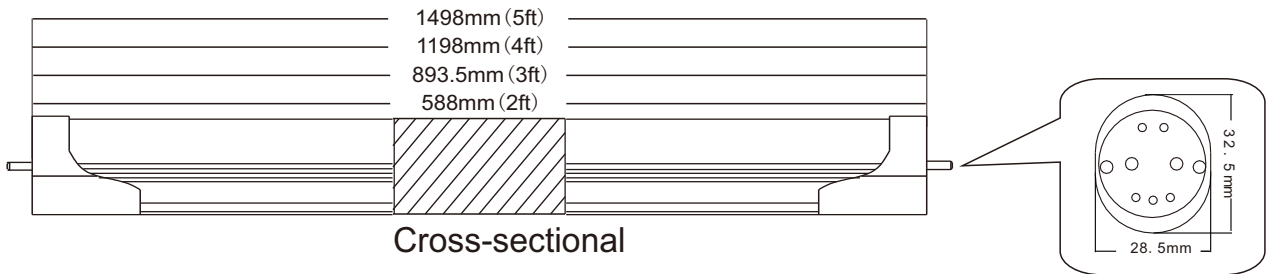

Cross-sectional

Features 產品特點>>

- ★ Microwave controlled internal sensor detection distance of 6-8M
- ★ Full lumen in activation mode 30% lumen in standby mode
- ★ Direct replacement of FL tubes in electro-magnetic ballast fitting
- ★ SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- ★ Exit time 15-60seconds
- ★ Emergency option available: compatible in use with most emergency battery brands & comply with part A11of FSD regulation PPA104

- ★ 微波控制內部感測器,感測器檢測距離6-8米
- ★ 啟動模式下為全流明,待機模式下為30%流明
- ★ 可直接更換電磁鎮流器配件中的FL管
- ★ SPM設計-電源電路保護,當個別led故障時切斷單個LED电路
- ★ 退出時間15-60秒
- ★ 提供應急選項:與大多數應急電池品牌相容,並符合FSD法規PPA104第A11部分

Specification 產品規格>>

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Length 長度 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Lamp Base 燈腳	PCS/CTN 每箱數量 (pcs)
ET-I0609-M128A	100~240	9	600	30,000	3000/4000/6500	100	>80	T8,G13	25
ET-I0912-M128A	100~240	12	900	30,000	3000/4000/6500	100	>80	T8,G13	25
ET-I1218-M128A	100~240	18	1200	30,000	3000/4000/6500	100	>80	T8,G13	25
ET-I1522-M128A	100~240	22	1500	30,000	3000/4000/6500	100	>80	T8,G13	25

Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
 Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
 This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意



東攏LED照明公司
EASTLIKE LED Co., Ltd

Office Address: Room B3, 18/F Bonsun Industrial Building, 364-366 Sha Tsui Road, Tsuen Wan, HongKong
 Phone: 852-39745593 Fax: 852-35440462 info@eastlike.com www.eastlike.com