



LED Lighting Series

CATALOG

Green | Low Carbon | Energy Saving

Hot Products Collection





製造和營銷綠色低碳節能照明產品
Manufacturing And Marketing Green Low Carbon
And Energy Saving Lighting Products

EASTLIKE LED COMPANY 東 櫚 照 明 公 司

EASTLIKE LED Co., Ltd • emerges as a lighting designer manufacturer and supplier established in Hong Kong and Mainland China .

The company devotes herself in the development, manufacturing and marketing of green, low-carbon and energy-saving lighting products. we are proud to provide a wide range of LED products

東櫚LED照明公司 • 您的照明設計師。

我們作為製造商和供應服務於香港和中國大陸。公司致力於開發，製造和行銷綠色，低碳和節能照明產品。

我們竭誠為您服務，為您提供種類繁多的LED產品。

Content

Content

1. LED Tube



Commercial LED T8 Tube



LED T5 Tube



Glass LED T8 Tube



Glass LED T5 Tube



High Lumen T8 GLASS TUBE



High Lumen T5 GLASS TUBE



High Lumen T8 LED Tube



DC LED T8 Tube With External Driver



Microwave Sensor LED T8 Tube



Microwave Sensor LED T5 Tube



T5 DC Tube And Driver



Phase Control Dimming LED T8 Tube



T5 Integrated LED Tube



LED PLC Tube



LED PLS Tube

2. Strip & Cabinet



10*13 Hard Light Bar Cabinet Light



10 * 10 Embedded Flexible Silicone Lamp Belt



24*8 Aluminum Lamp Strip Cabinet Lamp



18*12 Aluminum Lamp Strip Cabinet Lamp



T10 Waterproof Neon Light

3. Panel Light



LED Panel Light



LED Panel Light



LED Panel Light



LED Panel Light




LED Panel Light



Surface mounted LED panel lights



Radar sensor LED panel light



Microwave sensor panel light



Infrared Human Body Sensor Panel Light



Infrared Human Body Sensor Panel Light

4. DownLight & Ceiling Light



5. LED Floodlight



6. LED Bulb



7. Wall Lamp



8. Batten



1 / LED Tube



- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Length Can be customized according to customer needs.

Commercial LED T8 Tube

Series Type: L


Features 產品特點 >>

- Uniform light emission
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Optional: rotary end knob for angle adjustment



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0609-L128	9	600	30,000	4000	120	T8,G13	45	41
EL-I0609-L128	9	600	30,000	6500	120	T8,G13	45	41
EL-I1218-L128	18	1200	30,000	4000	120	T8,G13	55	50
EL-I1218-L128	18	1200	30,000	6500	120	T8,G13	55	50

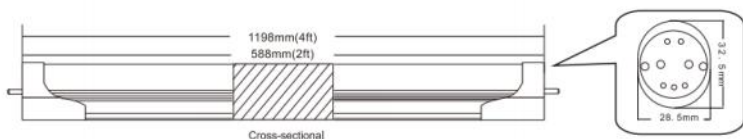

(Unit : mm)

Glass LED T8 Tube

Series Type: G

Features 產品特點 >>

- Uniform light emission
- SPM design - power circuit protection, which cuts off a single LED circuit in case of individual led failure
- Optional: angle adjustment knob



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0609-G128	9	600	30,000	4000	120	T8,G13	35	31
EL-I0609-G128	9	600	30,000	6500	120	T8,G13	35	31
EL-I1218-G128	18	1200	30,000	4000	120	T8,G13	45	41
EL-I1218-G128	18	1200	30,000	6500	120	T8,G13	45	41



(Unit : mm)

High Lumen T8 Glass Tube

Series Type: HL-G


Features 產品特點 >>

- Green Technology on Energy Efficiency Illumination
50% savings against other generic LED tubes
- Intensity loss of 5% or less compared to min 10% compared to other generic lightings.
- No Mercury, No IR, No UV Instant On
- Shatter Protect Design, Dual Diffuser Protection
- Cover Free (Avoiding spider web and maintenance issues)



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0605-G187	5	600	30,000	3000	180	T8,G13	56	50
EL-I0605-G187	5	600	30,000	4000	180	T8,G13	56	50
EL-I0605-G187	5	600	30,000	6500	180	T8,G13	56	50
EL-I1210-G207	10	1200	30,000	3000	200	T8,G13	60	54
EL-I1210-G207	10	1200	30,000	4000	200	T8,G13	60	54
EL-I1210-G207	10	1200	30,000	6500	200	T8,G13	60	54

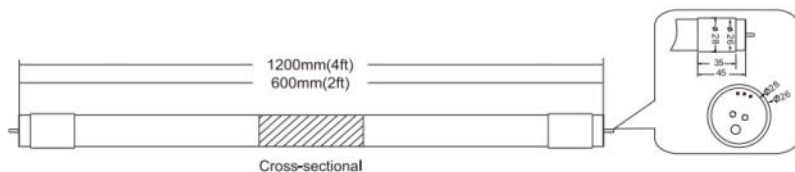

(Unit : mm)

High Lumen T5 Glass Tube

Series Type: I5-HL-G


Features 產品特點 >>

- Green Technology on Energy Efficiency Illumination
50% savings against other generic LED tubes
- Intensity loss of 5% or less compared to min 10% compared to other generic lightings.
- No Mercury, No IR, No UV Instant On
- Shatter Protect Design, Dual Diffuser Protection
- Cover Free (Avoiding spider web and maintenance issues)



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I50605-G167	5	600	30,000	3000	160	T8,G13	72	70
EL-I50605-G167	5	600	30,000	4000	160	T8,G13	72	70
EL-I50605-G167	5	600	30,000	6500	160	T8,G13	72	70
EL-I51210-G187	10	1200	30,000	3000	180	T8,G13	75	72
EL-I51210-G187	10	1200	30,000	4000	180	T8,G13	75	72
EL-I51210-G187	10	1200	30,000	6500	180	T8,G13	75	72

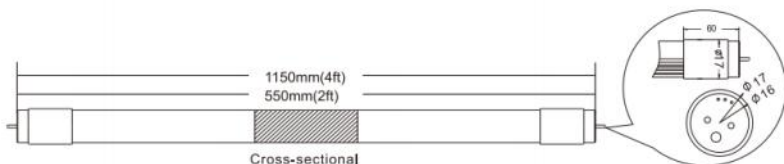

(Unit : mm)

High Lumen T8 LED Tube

Series Type: H


Features 產品特點 >>

- Uniform light emission
- Modification of existing T8 lamps
- SPM design, namely power circuit protection, can immediately cut off a single LED circuit in case of fault
- T8 tube body can achieve the best lighting effect



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0609-H158	9	600	30,000	4000	150	T8,G13	64	58
EL-I0609-H158	9	600	30,000	6500	150	T8,G13	64	58
EL-I1218-H158	18	1200	30,000	4000	150	T8,G13	72	65
EL-I1218-H158	18	1200	30,000	6500	150	T8,G13	72	65

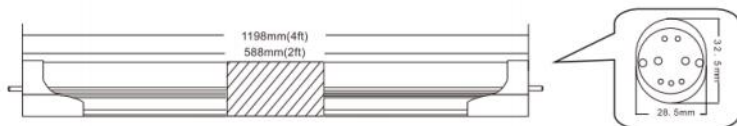

(Unit : mm)

DC LED T8 Tube With External Driver

Series Type: R-N

Features 產品特點 >>

- Uniform light emission
- Modification of existing T8 lamps
- SPM design, namely tube source circuit protection, can immediately cut off a single LED circuit in case of fault






Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批量價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-R0609-N128	9	600	30,000	4000	120	T8,G13	90	85
EL-R0609-N128	9	600	30,000	6500	120	T8,G13	90	85
EL-R1218-N128	18	1200	30,000	4000	120	T8,G13	100	95
EL-R1218-N128	18	1200	30,000	6500	120	T8,G13	100	95



Model LD-LT20



(Unit : mm)

Microwave Sensor LED T8 Tube

Series Type: M


Features 產品特點 >>

- Microwave controlled internal sensor detection distance of 6-8M.
- Full lumen in activation mode 30% lumen in standby mode.
- Direct replacement of FL tubes in electro-magnetic ballast fitting.
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned.
- Exit time 15s-60mins.
- Emergency option available: compatible in use with most emergency battery brands & comply with part
- A11of FSD regulation PPA104.




Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批量價 (HK\$)
	(W)	(mm)	(hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0609-M128A	9	600	30,000	3000	120	T8,G13	58	52
EL-I0609-M128A	9	600	30,000	4000	120	T8,G13	58	52
EL-I0609-M128A	9	600	30,000	6500	120	T8,G13	58	52
EL-I1218-M128A	18	1200	30,000	3000	120	T8,G13	75	66
EL-I1218-M128A	18	1200	30,000	4000	120	T8,G13	75	66
EL-I1218-M128A	18	1200	30,000	6500	120	T8,G13	75	66

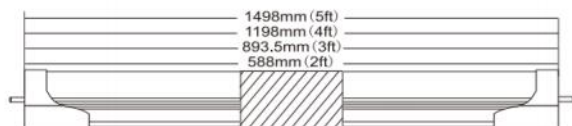

Cross-sectional



(Unit : mm)

Microwave Sensor LED T5 Tube

Series Type: M-I5


Features 產品特點 >>

- Microwave controlled internal sensor detection distance of 6-8M.
- Full lumen in activation mode 30% lumen in standby mode.
- Direct replacement of FL tubes in electro-magnetic ballast fitting.
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned.
- Exit time 15s-60mins.
- Emergency option available: compatible in use with most emergency battery brands & comply with part
- A11of FSD regulation PPA104.



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0609-M128A-T5G5	9	600	30,000	3000	120	T8,G13	58	52
EL-I0609-M128A-T5G5	9	600	30,000	4000	120	T8,G13	58	52
EL-I0609-M128A-T5G5	9	600	30,000	6500	120	T8,G13	58	52
EL-I1218-M128A-T5G5	18	1200	30,000	3000	120	T8,G13	75	66
EL-I1218-M128A-T5G5	18	1200	30,000	4000	120	T8,G13	75	66
EL-I1218-M128A-T5G5	18	1200	30,000	6500	120	T8,G13	75	66



(Unit : mm)

T5 DC Tube And Driver

Series Type: R5-N

Features 產品特點 >>

- Uniform light emission
- High luminous output 155lm/w & lower power consumption
- SPM design, namely tube source circuit protection, can immediately cut off a single LED circuit in case of fault
- T6 tube body to achieve the best lighting effect
- Low THD < 10%





Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19 pcs)	(20-100 pcs)
EL-R50608-N128	8	600	30,000	4000	120	T5,G5	90	85
EL-R50608-N128	8	600	30,000	6500	120	T5,G5	90	85
EL-R51216-N128	16	1200	30,000	4000	120	T5,G5	100	95
EL-R51216-N128	16	1200	30,000	6500	120	T5,G5	100	95



Model LD-LT20



(Unit : mm)

Phase Control Dimming LED T8 Tube

Series Type: LE


Features 產品特點 >>

- Dimming range 30-100% efficiency > 85%
- Dimming interface: traic / ELV, key dimmer
- Suitable for front cut or back cut dimmers
- PWM digital dimming, high frequency PWM dimming without changing LED color rendering index
- Short circuit / overheating / overload / overvoltage protection
- Daohe indoor environment



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I0609-LE128	9	600	30,000	4000	120	T8,G13	80	75
EL-I0609-LE128	9	600	30,000	6500	120	T8,G13	80	75
EL-I1218-LE128	18	1200	30,000	4000	120	T8,G13	90	85
EL-I1218-LE128	18	1200	30,000	6500	120	T8,G13	90	85

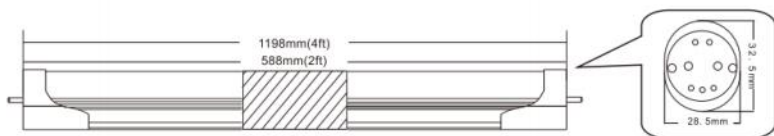

(Unit : mm)

T5 Integrated LED Tube

Series Type: T5-IB



Features 產品特點 >>

- T5 integrated pipe with internal driver bracket
- Pipes connected together by plugs or cables
- Seamless lighting output without dark spots
- Suitable for shallow grooves



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
EL-I50608-IB128	8	600	30,000	4000	120	T5,G5	39	38
EL-I50608-IB128	8	600	30,000	6500	120	T5,G5	39	38
EL-I51216-IB128	16	1200	30,000	4000	120	T5,G5	57	52
EL-I51216-IB128	16	1200	30,000	6500	120	T5,G5	57	52



(Unit : mm)

LED PLC Tube

Series Type: C


Features 產品特點 >>

- Beautiful and delicate appearance, suitable for home and commercial use
- Shuxin light quality, color rendering index 80, eliminate stroboscopic, no mercury or other harmful substances
- Long and durable, with an average life of 30000 hours environmental protection and energy saving
- High quality aluminum heat dissipation design, extend the service life of products
- Easy to install, easy to replace, plug and play, no need to change the line, compatible with the original ballast and lamps



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批量價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
ELPL-C04-H128	4	117	30,000	4000	120	G24	45	41
ELPL-C04-H128	4	117	30,000	6500	120	G24	45	41
ELPL-C06-H128	6	150	30,000	4000	120	G24	49	45
ELPL-C06-H128	6	150	30,000	6500	120	G24	49	45

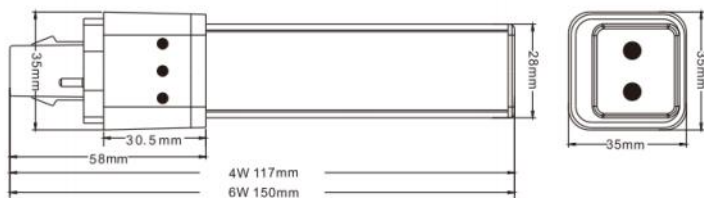

(Unit: mm)

LED PLS Tube

Series Type: S


Features 產品特點 >>

- Energy saving: 80% more energy-saving than traditional incandescent bulbs
- Ecological green: no radiation, mercury, lead and coke harmful elements, and all products can be recycled
- Long service life: use 50000 small poems of poison life, which is 10 times that of traditional light source
- High luminous efficiency: the product can reach 120lm / W
- It is safe and easy to use and install
- This product is applicable to indoor places requiring high brightness and energy saving, such as cars, offices, banks, hospitals, shopping malls, MRT, schools and so on



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 燈腳	Unit Price 零售價 (HK\$)	Bulk Price 批量價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		(1-19pcs)	(20-100pcs)
ELPL-S04-H128	4	165	30,000	4000	120	G23	42	38
ELPL-S04-H128	4	165	30,000	6500	120	G23	42	38
ELPL-S06-H128	6	165	30,000	4000	120	G23	46	42
ELPL-S06-H128	6	165	30,000	6500	120	G23	46	42

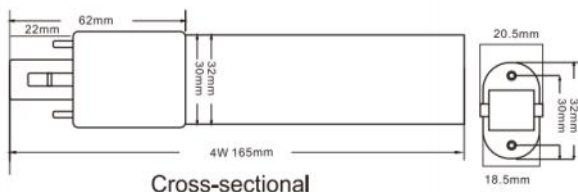

(Unit : mm)

2 / Strip & Cabinet



- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Length Can be customized according to customer needs.

10*13 Hard Light Bar Cabinet Light

Series Type: EKBCB12


Features 產品特點 >>

- Small size: 10 mm (width) *13 mm (height)
Minimum cutting length < 3mm
- Design with SPM - cut off single LED in case of failure
- Thermal conductive plastic with the best heat dissipation
- Series installation for seamless lighting output
- Uniform illumination, no LED light spot
- Application: cabinet, bathroom cabinet, wardrobe, display cabinet, retail store, etc



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光衰壽命	Colour Temp. 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ECBL-P1013-S1004	4	1200	30,000	3000	100	104	104
ECBL-P1013-S1004	4	1200	30,000	6500	100	104	104
ECBL-P1013-S1008	8	1200	30,000	3000	100	94	94
ECBL-P1013-S1008	8	1200	30,000	6500	100	94	94



(Unit : mm)

10 * 10 Embedded Flexible Silicone Lamp Belt

Series Type: ELBEG10


Features 產品特點 >>

- Insulation, flame retardant, safe and durable
- High light transmittance, corrosion resistance and bending resistance
- Waterproof and moisture-proof



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光衰壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ESLB-P1010-S1004	4	1000	30,000	3000	100	112	112
ESLB-P1010-S1004	4	1000	30,000	6500	100	112	112
ESLB-P1010-S1008	8	1000	30,000	3000	100	100	100
ESLB-P1010-S1008	8	1000	30,000	6500	100	100	100



(Unit : mm)

24 * 8 Aluminum Lamp Strip Cabinet Lamp

Series Type: EAC2408


Features 產品特點 >>

- Lamp body material: Aviation 6063 aluminum
- Size: 24.8 mm x 8.5 mm high
- Micro arc light-emitting cover with larger brightening surface
- The lamp body is smooth, high brightness, light and ultra-thin
- Anti UV, no yellow, high light transmittance
- It is applicable to the lighting of cabinets, wine cabinets, wardrobe, display cabinets, lockers and other furniture



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光衰壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (RMB)	Bulk Price 批發價 (RMB)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ECBL-A2408	12	1000	30,000	3000	100	96	86
ECBL-A2408	12	1000	30,000	4000	100	96	86
ECBL-A2408	12	1000	30,000	6500	100	96	86

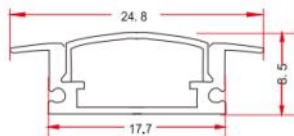

(Unit : mm)

18*12 Aluminum Lamp Strip Cabinet Lamp

Series Type: EAC1812


Features 產品特點 >>

- Lamp body material: Aviation 6063 aluminum
- Size: 17.5mm (height) x11.8mm (height)
- Round plug, flat plug, multicolor aluminum, more perfect with furniture decoration
- Uniform lighting, no dark area, and the lighting in the cabinet is preferred
- The whole lamp surface is anodized, which is more durable. The lamp body is serrated and installed more firmly
- It is applicable to the lighting of cabinets, wine cabinets, wardrobe, display cabinets, lockers and other furniture



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (RMB)	Bulk Price 批發價 (RMB)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ECBL-A1812	8	1000	30,000	3000	100	96	86
ECBL-A1812	8	1000	30,000	4000	100	96	86
ECBL-A1812	8	1000	30,000	6500	100	96	86



(Unit: mm)

T10 Waterproof Neon Light

Series Type: ELBNT15


Features 產品特點 >>

- High brightness patch 2835 LED is used as high brightness wide viewing angle light source
- Silicone material, weather resistance is very good
- Led quantity: 120PCS/M
- Hollow design, good heat dissipation
- It can be cut at will
- The plug is specially designed to facilitate modeling and docking, and there is no dark area for docking
- The light band is very soft, easy to install and any shape
- Suitable for indoor and outdoor



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (RMB)	Bulk Price 批發價 (RMB)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ESLB-NL-T10	9.6	1000	30,000	3000	100	76	69
ESLB-NL-T10	9.6	1000	30,000	4000	100	76	69
ESLB-NL-T10	9.6	1000	30,000	6500	100	76	69

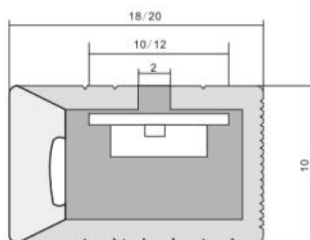

(Unit : mm)

3 / Panel Light




LED Panel Light

Series Type: EPLPN11


Features 產品特點 >>

- New direct light emitting technology, no video flash design
- The new lens does not turn yellow
- Long service life and lasting brightness
- Specially designed for ceiling, suitable for all kinds of commercial lighting
- Ceiling installation (equipped with hardware hook and triangle)



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ELPL-PN3030-T	20	300*300*35	30,000	4000	100	90	85
ELPL-PN3030-T	20	300*300*35	30,000	6500	100	90	85



(Unit : mm)

LED Panel Light

Series Type: EPLPN12

Features 產品特點 >>

- New direct light emitting technology, no video flash design
- The new lens does not turn yellow
- Long service life and lasting brightness
- Specially designed for ceiling, suitable for all kinds of commercial lighting
- Ceiling installation (equipped with hardware hook and triangle)



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ELPL-PN3060-T	40	300*600*35	30,000	4000	100	132	125
ELPL-PN3060-T	40	300*600*35	30,000	6500	100	132	125




(Unit : mm)

Panel Light

Series Type: EPLPN22


Features 產品特點 >>

- New direct light emitting technology, no video flash design
- The new lens does not turn yellow
- Long service life and lasting brightness
- Specially designed for ceiling, suitable for all kinds of commercial lighting
- Ceiling installation (equipped with hardware hook and triangle)



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
ELPL-PN6060-T	32	600*600*35	30,000	4000	100	180	162
ELPL-PN6060-T	32	600*600*35	30,000	6500	100	180	162



(Unit : mm)

Panel Light

Series Type: EPLPN24

Features 產品特點 >>

- New direct light emitting technology, no video flash design
- The new lens does not turn yellow
- Long service life and lasting brightness
- Specially designed for ceiling, suitable for all kinds of commercial lighting
- Ceiling installation (equipped with hardware hook and triangle)



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		
ELPL-PN60120-T	70	600*1200*35	30,000	4000	100	240	216
ELPL-PN60120-T	70	600*1200*35	30,000	6500	100	240	216



(Unit : mm)

LED Panel Light

Series Type: EL-PN-R



Features 產品特點 >>

- New direct light emitting technology, no video flash design
- The new lens does not turn yellow
- Long service life and lasting brightness
- Specially designed for ceiling, suitable for all kinds of commercial lighting



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-PN-6060-R	36	595*595*30	20,000	4000	90	133	125
EL-PN-6060-R	36	595*595*30	20,000	6500	90	133	125
EL-PN-30120-R	48	595*1195*30	20,000	4000	90	163	153
EL-PN-30120-R	48	595*1195*30	20,000	6500	90	163	153

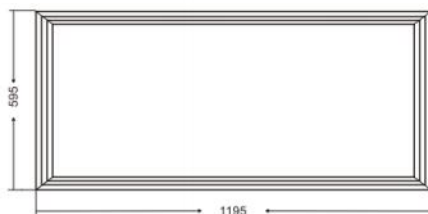

(Unit : mm)

Surface mounted LED panel lights

Series Type: EL-PN-S



Features 產品特點 >>

- New direct light emitting technology, no video flash design
- The new lens does not turn yellow
- Long service life and lasting brightness
- Specially designed for ceiling, suitable for all kinds of commercial lighting



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-PN-6060-S	38	600*600	20,000	4000	90	114	107
EL-PN-6060-S	38	600*600	20,000	6500	90	114	107
EL-PN-30120-S	50	300*1200	20,000	4000	90	154	145
EL-PN-30120-S	50	300*1200	20,000	6500	90	154	145

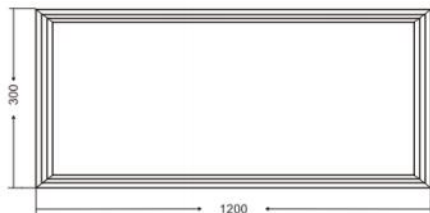

(Unit : mm)

Radar sensor LED panel light

Series Type: EL-PN-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 6-8 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-PN-3030-M-01	18	300*300*35	20,000	3000	100	110	98
EL-PN-3030-M-01	18	300*300*35	20,000	4000	100	110	98
EL-PN-3030-M-01	18	300*300*35	20,000	6500	100	110	98
EL-PN-6060-M-02	36	600*600*35	20,000	3000	100	148	139
EL-PN-6060-M-02	36	600*600*35	20,000	4000	100	148	139
EL-PN-6060-M-02	36	600*600*35	20,000	6500	100	148	139



(Unit : mm)

Microwave sensor panel light

Series Type: EL-PN-M


Features 產品特點 >>

- The aluminum alloy frame is corrosion-resistant and oxidation-resistant for a long lifespan.
- The PS light panel is waterproof and oil-resistant, delivering a soft, translucent light.
- The high-brightness LED chip is energy-efficient and durable, reproducing true-to-life, bright, and long-lasting light.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1~19pcs)	(20~100pcs)
ELPL-PN3030-M	18	300*300*35	20,000	3000	70	136	128
ELPL-PN3030-M	18	300*300*35	20,000	4000	70	136	128
ELPL-PN3030-M	18	300*300*35	20,000	6500	70	136	128
ELPL-PN6060-M	36	600*600*35	20,000	3000	70	218	205
ELPL-PN6060-M	36	600*600*35	20,000	4000	70	218	205
ELPL-PN6060-M	36	600*600*35	20,000	6500	70	218	205

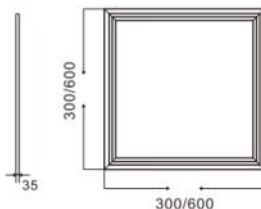

(Unit : mm)

Infrared Human Body Sensor Panel Light

Series Type: EL-PN-S-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 4-6 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-PN-S1717-M	12	170*170	155*155	20,000	4000	100	60	55
EL-PN-S1717-M	12	170*170	155*155	20,000	6500	100	60	55



(Unit : mm)

Infrared Human Body Sensor Panel Light

Series Type: EL-PN-R-M

Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 4-6 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批量價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-PN-R120-M	6	120*120	20,000	4000	100	55	50
EL-PN-R120-M	6	120*120	20,000	6500	100	55	50



(Unit : mm)

4 / DownLight & Ceiling Light



LED Embedded 4.5-inch Downlight

Series Type: ELBNT15

Features 產品特點 >>

- Die casting aluminum shell
- Uniform light emission without stroboscopic
- Embedded installation, installation aperture: 3.5 inches
- Power and color temperature can be customized according to requirements




Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs)	(K)	(Lm/W)		
EL-DL-0405A	5	110*110*30	90	30,000	4000	100	68	62
EL-DL-0405A	5	110*110*30	90	30,000	6500	100	68	62



(Unit : mm)



LED Embedded 2.5cm Thin Downlight/ceiling Light

Series Type: EDLEA60

Features 產品特點 >>

- Exquisite frosted surface lampshade, soft light
- Thickened aluminum, strong oxidation resistance
- High color rendering to restore true color
- Embedded installation, installation aperture: 130mm




Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs)	(K)	(Lm/W)		
EL-DL-0609-UC	9	145*145*25	130	30,000	4000	100	118	106
EL-DL-0609-UC	9	145*145*25	130	30,000	6500	100	118	106



(Unit: mm)



Straight LED Downlight

Series Type: EL-DL-T



Features 產品特點 >>

- Constructed of aluminum, it's glare-resistant and non-dazzling.
- No visible flicker.
- Effective heat dissipation.
- High brightness and energy saving.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-DL-0412-T	12	Ø145x30	120-130	20,000	3000	100	55	50
EL-DL-0412-T	12	Ø145x30	120-130	20,000	4000	100	55	50
EL-DL-0412-T	12	Ø145x30	120-130	20,000	6500	100	55	50
EL-DL-0618-T	18	Ø185x30	145-170	20,000	3000	100	65	60
EL-DL-0618-T	18	Ø185x30	145-170	20,000	4000	100	65	60
EL-DL-0618-T	18	Ø185x30	145-170	20,000	6500	100	65	60
EL-DL-0824-T	24	Ø185x30	190-210	20,000	3000	100	80	75
EL-DL-0824-T	24	Ø185x30	190-210	20,000	4000	100	80	75
EL-DL-0824-T	24	Ø185x30	190-210	20,000	6500	100	80	75



(Unit : mm)

High-efficiency LED Downlights

Series Type: EL-DL-HL



Features 產品特點 >>

- Constructed of aluminum, it's glare-resistant and non-dazzling.
- No visible flicker.
- Effective heat dissipation.
- High brightness and energy saving.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs)	(K)	(Lm/W)	(1-10pcs)	(20-100pcs)
EL-DL-0408-HL	4	Ø145x30	120	20,000	4000	180	65	60
EL-DL-0408-HL	4	Ø145x30	120	20,000	6500	180	65	60
EL-DL-0612-HL	6	Ø175x30	150	20,000	4000	180	78	72
EL-DL-0612-HL	6	Ø175x30	150	20,000	6500	180	78	72



(Unit : mm)

Round Surface Mounted Radar Sensor LED Downlight

Series Type: EL-DL-R-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 6-8 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-DL-R0412-M	9	140*140	20,000	4000	100	48	43
EL-DL-R0412-M	9	140*140	20,000	6500	100	48	43
EL-DL-R0812-M	12	200*200	20,000	4000	100	78	73
EL-DL-R0812-M	12	200*200	20,000	6500	100	78	73



(Unit : mm)

Round Surface Mounted PIR Human Motion Sensor LED Downlight

Series Type: EL-DL-R-PIR

Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 4-6 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-DL-R0409-PIR	9	140*140	20,000	4000	100	50	45
EL-DL-R0409-PIR	9	140*140	20,000	6500	100	50	45
EL-DL-R0812-PIR	12	200*200	20,000	4000	100	80	75
EL-DL-R0812-PIR	12	200*200	20,000	6500	100	80	75



(Unit : mm)

Radar sensor LED downlight

Series Type: EL-DL-P-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 6-8 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-DL-P0409-M	9	135*135	110-120	20,000	4000	100	48	43
EL-DL-P0409-M	9	135*135	110-120	20,000	6500	100	48	43
EL-DL-P0612-M	12	180*180	155	20,000	4000	100	65	60
EL-DL-P0612-M	12	180*180	155	20,000	6500	100	65	60

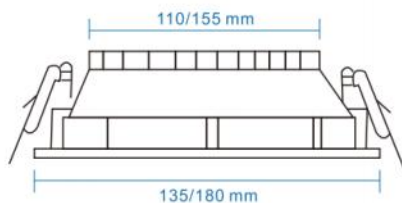

(Unit : mm)

PIR human body induction LED downlight

Series Type: EL-DL-P-PIR


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 4-6 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Opening size 開孔尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-DL-P0205-PIR	5	100*100	75-85	20,000	4000	100	40	35
EL-DL-P0205-PIR	5	100*100	75-85	20,000	6500	100	40	35
EL-DL-P0307-PIR	7	115*115	90-100	20,000	4000	100	55	50
EL-DL-P0307-PIR	7	115*115	90-100	20,000	6500	100	55	50

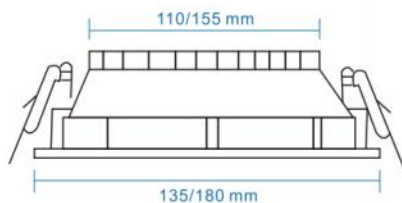

(Unit : mm)

High-efficiency LED Downlights

Series Type: EL-DL-HL


Features 產品特點 >>

- High color rendering COB chip light source
- No visible flicker
- Stable power
- Soft light



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-DL-0207-S	7	Ø75x85	20,000	4000	80	91	85
EL-DL-0207-S	7	Ø75x85	20,000	6500	80	91	85
EL-DL-0212-S	12	Ø75x85	20,000	4000	80	91	85
EL-DL-0212-S	12	Ø75x85	20,000	6500	80	91	85



(Unit : mm)

LED Radar Sensor Ceiling Light

Series Type: EL-ILR-S220-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 6-8 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-ILR-S220-15-M	15	220*220*20	20,000	3000-6500	100	95	90



(Unit : mm)

LED Radar Sensor Ceiling Light

Series Type: EL-ILR-R230-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 6-8 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Product size 產品尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-ILR-R230-18-M	18	230*230*25	20,000	3000-6500	100	95	90



(Unit : mm)

5 / LED Floodlight



LED Floodlight

Series Type: EL-FL-A


Features 產品特點 >>

- Material: aluminum, Clear tempered Glass
Using the famous Bridgelux COB LED
- Flexible mounting bracket for easy installation and removal
- Better heat dissipation design to extend product life
- Suitable for indoor and outdoor lighting applications



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp. 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-FL-A50	50	220*195*45.5	30,000	3000	150	286	276
EL-FL-A50	50	220*195*45.5	30,000	4000	150	286	276
EL-FL-A50	50	220*195*45.5	30,000	6500	150	286	276
EL-FL-A100	100	265*240*48.5	30,000	3000	150	448	438
EL-FL-A100	100	265*240*48.5	30,000	4000	150	448	438
EL-FL-A100	100	265*240*48.5	30,000	6500	150	448	438
EL-FL-A200	200	360*320*56.5	30,000	3000	150	850	840
EL-FL-A200	200	360*320*56.5	30,000	4000	150	850	840
EL-FL-A200	200	360*320*56.5	30,000	6500	150	850	840



LED Floodlight

Series Type: EL-FL-A-SL


Features 產品特點 >>

- Material: aluminum, Clear tempered Glass
Using the famous Bridgelux COB LED
- Flexible mounting bracket for easy installation and removal
- Better heat dissipation design to extend product life
- Suitable for indoor and outdoor lighting applications



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp. 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-FL-A50-SL	50	280*230*53	30,000	3000	130	275	265
EL-FL-A50-SL	50	280*230*53	30,000	4000	130	275	265
EL-FL-A50-SL	50	280*230*53	30,000	6500	130	275	265
EL-FL-A100-SL	100	330*305*60	30,000	3000	130	465	455
EL-FL-A100-SL	100	330*305*60	30,000	4000	130	465	455
EL-FL-A100-SL	100	330*305*60	30,000	6500	130	465	455
EL-FL-A200-SL	200	390*370*60	30,000	3000	130	748	738
EL-FL-A200-SL	200	390*370*60	30,000	4000	130	748	738
EL-FL-A200-SL	200	390*370*60	30,000	6500	130	748	738



LED Remote Control Sensor Waterproof Floodlight

Series Type: EL-FL-PIR-RC


Features 產品特點 >>

- The sensor head rotates forward and backward, left and right;
- Ultra-long-distance sensing and remote control;
- Customizable off-time settings and long/short sensing distance;
- Customizable settings for always-on/always-off and sensor functions.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-FL-PIR10W-RC	10	102*80*26	30,000	3000	100	75	70
EL-FL-PIR10W-RC	10	102*80*26	30,000	4000	100	75	70
EL-FL-PIR10W-RC	10	102*80*26	30,000	6500	100	75	70
EL-FL-PIR30W-RC	30	165*135*30	30,000	3000	100	95	89
EL-FL-PIR30W-RC	30	165*135*30	30,000	4000	100	95	89
EL-FL-PIR30W-RC	30	165*135*30	30,000	6500	100	95	89



Unit : mm

LED sensor waterproof floodlight

Series Type: EL-FL-PIR


Features 產品特點 >>

- The sensor head rotates forward and backward, left and right;
- Ultra-long-distance sensing;
- Customizable off-time and long/short sensing distance;
- Customizable normally on/off and sensing functions.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-FL-PIR10W	10	102*80*26	30,000	3000	100	68	62
EL-FL-PIR10W	10	102*80*26	30,000	4000	100	68	62
EL-FL-PIR10W	10	102*80*26	30,000	6500	100	68	62
EL-FL-PIR30W	30	165*135*30	30,000	3000	100	72	67
EL-FL-PIR30W	30	165*135*30	30,000	4000	100	72	67
EL-FL-PIR30W	30	165*135*30	30,000	6500	100	72	67



Unit : mm

Smart sensor LED mining lamp

Series Type: EL-HB-A-UFO-M


Features 產品特點 >>

- Dial-control brightness settings in three levels: 50%/75%/100%;
- Light-sensing function: When ambient light is sufficient, the sensor turns off. At night or when ambient light is low, the sensor activates, triggering the presence of a person and shutting off the light after they leave.
- Sensing range: 10m, 120-degree angle.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs.)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-HB-A60-UFO-M	60	200*200*145	30,000	3000	100	415	390
EL-HB-A60-UFO-M	60	200*200*145	30,000	4000	100	415	390
EL-HB-A60-UFO-M	60	200*200*145	30,000	6500	100	415	390
EL-HB-A150-UFO-M	150	280*280*148	30,000	3000	100	587	552
EL-HB-A150-UFO-M	150	280*280*148	30,000	4000	100	587	552
EL-HB-A150-UFO-M	150	280*280*148	30,000	6500	100	587	552



6 / LED Bulb



LED Bulb Lamp

Series Type: EBLBL11


Features 產品特點 >>

- Flicker free design, UV free
- No mercury or other harmful substances
- Beautiful and slim appearance, suitable for home and commercial use
- Long life and durability, with an average life of up to 30000 hours, environmental protection and energy saving
- Easy to install and use



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		
ELBSL-P06-H108	6	60*60*111	30,000	4000	100	38	36
ELBSL-P06-H108	6	60*60*111	30,000	6500	100	38	36



High Brightness LED Bulb

Series Type: EBLHL11


Features 產品特點 >>

- Can replace the traditional tungsten filament lamp: 100W, can replace the traditional fluorescent lamp:
- 20W
- 90% more energy-saving than GLS and 70% more energy-saving than CFL
- Flicker free design, UV free
- No mercury or other harmful substances
- Beautiful and slim appearance, suitable for home and business
- Long life and durability, with an average life of up to 30000 hours



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		
ELBL-P06-H108	5	60*60*110	30,000	4000	100	38	35
ELBL-P06-H108	5	60*60*110	30,000	6500	100	38	35
ELBL-P08-H108	10	60*60*110	30,000	4000	100	45	41
ELBL-P08-H108	10	60*60*110	30,000	6500	100	45	41



7 / Wall Lamp



Oval Surface Mounted Waterproof Lamp

Series Type: ECBWL1C


Features 產品特點 >>

- Rainproof and insect proof
- Integrated design
- IP65 waterproof function



Specification 產品規格 >>

Model 型號	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)		
ELWL-0815-E	15	210	30,000	4000	100	78	70
ELWL-0815-E	15	210	30,000	6500	100	78	70
ELWL-1022-E	22	270	30,000	4000	100	85	78
ELWL-1022-E	22	270	30,000	6500	100	85	78



LED three-proof constant light wall lamp

Series Type: EL-WL-P


Features 產品特點 >>

- High color rendering light source.
- No visible flicker.
- Stable power.
- Soft light.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-WL-P12	12	220*100*38	20,000	4000	100	58	53
EL-WL-P12	12	220*100*38	20,000	6500	100	58	53

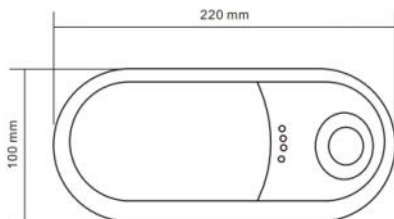

Sound and light controlled LED triple proof wall lamp

Series Type: EL-WL-P-V


Features 產品特點 >>

- Sound-activated sensor with high sensitivity: The light turns on when a sound level of 60dB or higher is heard.
- Light-activated: The light turns off during daytime or in bright sunlight. When the light dims, a sound exceeding 60dB from a person passing by turns on the light.
- Delay function: The light enters standby mode after a person leaves the sensor range for 60 seconds.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-WL-P12-V	12	220*100*38	20,000	4000	100	58	53
EL-WL-P12-V	12	220*100*38	20,000	6500	100	58	53

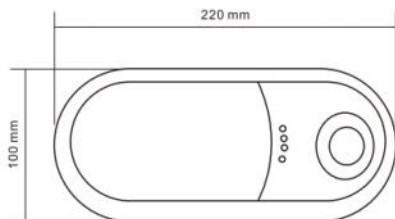

Infrared sensor LED triple-proof wall light

Series Type: EL-WL-P-PIR


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 4-6 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.



Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-WL-P12-PIR	12	220*100*38	20,000	4000	100	58	53
EL-WL-P12-PIR	12	220*100*38	20,000	6500	100	58	53

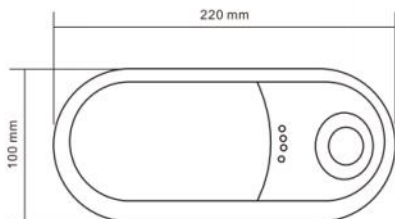

Radar sensor LED tri-proof wall light

Series Type: EL-WL-P-M


Features 產品特點 >>

- Human body triggering sensor with a wide sensing range of 6-8 meters in diameter and a 120-degree angle.
- Light control function: The light is off during daytime or in bright sunlight. When the light dims, the light turns on when someone enters the sensing range.
- Delay function: If a person leaves the sensing range for 30 seconds, the light enters standby mode.




Specification 產品規格 >>

Model 型號	Wattage 功率	Size 尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(1-19pcs)	(20-100pcs)
EL-WL-P12-M	12	220*100*38	20,000	4000	100	58	53
EL-WL-P12-M	12	220*100*38	20,000	6500	100	58	53

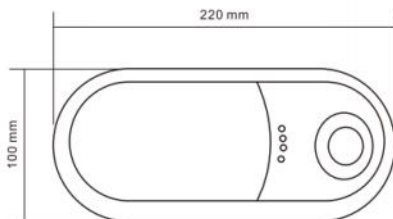

8 / Batten

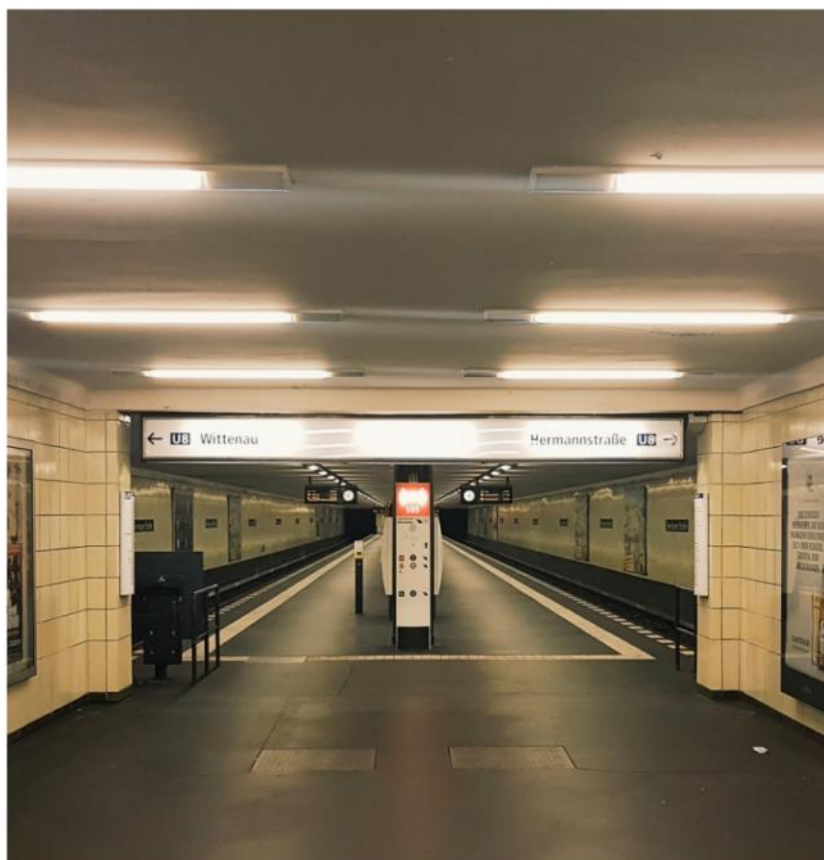

T8 Ordinary Single Support

Series Type: EDBC8


Features 產品特點 >>

- The shell adopts arc streamline design, novel and unique
- Electrostatic spraying treatment, which is durable
- The lamp holder adopts cut in rotary design, safe and reliable
- Applicable places: family, school, office, factory, etc



Specification 產品規格 >>

Model 型號	Material 材料	Length 長度	Lamp Life 光度壽命	Number Of Tube 燈管數量	Carton Size 外箱尺寸	Weight 重量	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
		(mm)	(Hrs)	(pcs)	(mm)	(kg)	(1-19pcs)	(20-100pcs)
ELDBA-S0609-Y	Iron	614	30,000	1pcs*0.6m(2ft)	640*80*60	0.55	25	22
ELDBA-S1218-Y	Iron	1224	30,000	1pcs*1.2m(4ft)	1240*80*60	1.15	35	32



(Unit : mm)

T5 Ordinary Single Support

Series Type: EDBC8


Features 產品特點 >>

- The shell adopts arc streamline design, novel and unique
- Electrostatic spraying treatment, which is durable
- The lamp holder adopts cut in rotary design, safe and reliable
- Applicable places: family, school, office, factory, etc



Specification 產品規格 >>

Model 型號	Material 材料	Length 長度	Lamp Life 光度壽命	Number Of Tube 燈管數量	Carton Size 外箱尺寸	Weight 重量	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
		(mm)	(Hrs)	(pcs)	(mm)	(kg)	(1-19pcs)	(20-100pcs)
ELDBA-S0609-Y	Iron	580	30,000	1pcs*0.6m(2ft)	580*40*30	0.5	25	22
ELDBA-S1218-Y	Iron	1180	30,000	1pcs*1.2m(4ft)	1180*40*33	1	35	32



580 / 1180



(Unit : mm)

T8 Single Aluminum Bracket

Series Type: DBA-Y


Features 產品特點 >>

- Power is supplied via ports on both sides of the light stand, compatible with T8 double-ended LED tubes. The all-copper pins provide stable power and consistent light output.
- The stand's housing is constructed of aluminum for a sturdy, non-deformable structure, and the flame-retardant ABS cap prevents leakage and provides added safety.
- It is widely suitable for use in factories, workshops, schools, hospitals, homes, and other locations.



Specification 產品規格 >>

Model 型號	Material 材料	Size 尺寸	IP Rating IP 等級	Number Of Tube 燈管數量	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
		(mm)		(pcs)	(1-19 pcs)	(20-100 pcs)
ES-DBA-Y06	Aluminum+ABS	600*32*50	20	1pcs*0.6m(2ft)	14	13
ES-DBA-Y12	Aluminum+ABS	1200*32*50	20	1pcs*1.2m(4ft)	20	18

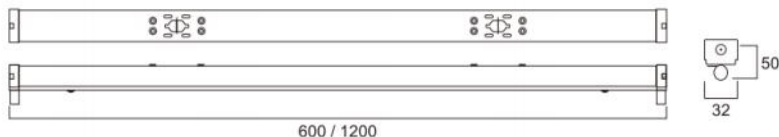

(Unit: mm)

T8 Waterproof Single Support

Series Type: EIPP8


Features 產品特點 >>

- Waterproof grade: IP65; Certification standard: CE RoHS
- It has waterproof, dustproof, insect proof
- Suitable for T8 and T5 fluorescent tubes, LED tube
- Made of high-quality PC material, it is not easy to crack
- Various materials: PC, PS, ABS optional



Specification 產品規格 >>

Model 型號	Material 材料	Length 長度	Lamp Life 光度壽命	Number Of Tube 燈管數量	Carton Size 外箱尺寸	Weight 重量	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
		(mm)	(Hrs)	(pcs)	(mm)	(kg)	(1-19pcs)	(20-100pcs)
ELIPB-P0609-N65-S	ABS+PC	660	30,000	1pcs*0.6m(2ft)	685*100*110	0.9	95	85
ELIPB-P1218-N65-S	ABS+PC	1260	30,000	1pcs*1.2m(4ft)	1295*100*110	1.7	118	108



(Unit : mm)

T8 Waterproof Double Support

Series Type: EIDP8


Features 產品特點 >>

- Waterproof grade: IP65; Certification standard: CE RoHS
- It has waterproof, dustproof, insect proof
- Suitable for T8 and T5 fluorescent tubes, LED tubes
- Made of high-quality PC material, it is not easy to crack
- Various materials: PC, PS, ABS optional



Specification 產品規格 >>

Model 型號	Material 材料	Length 長度	Lamp Life 光度壽命	Number Of Tube 燈管數量	Carton Size 外箱尺寸	Weight 重量	Unit Price 零售價 (HK\$)	Bulk Price 批發價 (HK\$)
		(mm)	(Hrs)	(pcs)	(mm)	(kg)	(1-19pcs)	(20-100pcs)
ELIPB-P0609-N65-D	ABS+PC	660	30,000	2pcs*0.6m(2ft)	685*150*110	1.2	118	108
ELIPB-P1218-N65-D	ABS+PC	1260	30,000	2pcs*1.2m(4ft)	1295*150*110	2.3	148	136



(Unit : mm)



下單前Q&A

Q1: 輸入電壓選擇

A1: 輸入電壓: ☐ ☐ ☐ ☐ ☐
AC220V AC110V DC48V DC24V 其他

Q2: THD要求

A2: THD要求: ☐ ☐ ☐ ☐
<10% <15% <20% 無所謂

Q3: 是T5還是T8燈管，長度多少？

A3: T5  T5燈管直徑在16mm
螢光燈管規格功率：
2R14W, 3R21W, 4R28W, 5R35W

T8  T8燈管直徑是26mm
螢光燈管規格功率：
2R18W, 3R30W, 4R36W, 5R58W


(☐ ☐)
T5 T8

Q4: 支架裏面電子牛還是綫牛？

(☐ ☐ ☐)
新支架 電子牛 綫牛


A4.1: 舊的螢光燈管支架左邊或右邊只要看到Starter亦稱為“啟輝器”，即可判斷為綫牛支架。

A4.1.1: 雙端入綫牛支架更換成雙端入綫LED
常規燈管的操作方法：

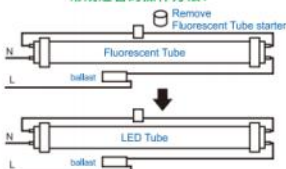

• 綫牛支架內接線圖
綫牛支架用普通LED燈管替換。


A4.1.2: 雙端入綫牛支架更換成單端入綫LED
常規燈管的操作方法：

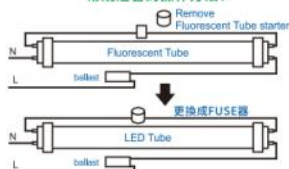

• 綫牛支架內接線圖
綫牛支架用普通LED燈管替換。

A4.2: 若舊的螢光燈管支架無論哪個方向看都看不到Starter亦稱為“啟輝器”，即可判斷為電子牛支架。


A4.2.1: 雙端入綫電子牛支架更換成雙端入綫LED
相容燈管的操作方法：

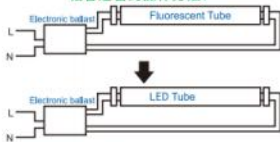

• 電子牛支架內接線圖

電子牛需要專用的兼容燈管(需提供到電子牛品牌和型號)或改裝線路才可以用。

A4.2.2: 雙端入綫電子牛支架更換成雙端入綫LED
常規燈管的操作方法：

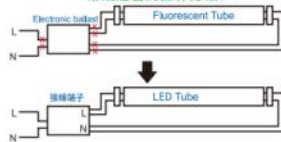

• 電子牛支架內接線圖


A4.2.3: 雙端入綫電子牛支架更換成單端入綫LED常規燈管的操作方法：



• 電子牛支架內接線圖

Q5: 是單端還是雙端接線？

(☐ ☐)
單端 雙端

A5: 
單端接線


雙端接線

Q6: 關於色溫

A6:

WB SETTINGS	COLOR TEMPERATURE	LIGHT SOURCES
	10000-15000K	Clear Blue Sky
	6500-8000K	Cloudy Sky / Shade
	6500-7000K	Noon Sunlight
	5500-6500K	Average Daylight
	5000-5500K	Electronic Flash
	4000-5000K	Fluorescent Light
	3000-4000K	Early AM/ Late PM
	2500-3000K	Domestic Lighting
	1000-2000K	Candle Flame

(☐ ☐ ☐ ☐ ☐ ☐)
2700k 3000k 4000k 6000k Dynamic White 其他



6000K日光色, 4000K冷白色,
3000K暖白色, 2700K白熾燈色。
如原來螢光燈標示840代表CRI80, 4000K

Q7: 關於顯色指數CRI

A7:




CRI	90-100	80-89	60-79	40-59	20-39
	優良	傑出	一般	欠佳	較差

CRI顯色指數以Ra來表示, 天然光的顯色度為100Ra, Ra越大顯色性能越好, 我司燈管常規CRI大於80。

Q8: 線牛支架內有大電容

A8:



• 新支架內之接線圖
需要拆原有大電容 (直接用剪鉗把線剪斷), 否則會影響燈管不良率高。

(☐ ☐)
有 無

Q9: 關於功率(W)

A9:



T8 LED燈管常規尺寸:
2尺9W, 3尺13W, 4尺18W, 5尺22W

可按需訂製不同功率, 配合能源節能計劃

(☐ ☐ ☐ ☐ ☐)
2尺9W 3尺13W 4尺18W 5尺22W 其他

Q10: 關於光效(lm/W)

A10:




同功率燈光效越高越亮,
另替代原T8螢光燈光效高,
功率可以做低省電。

(☐ ☐ ☐ ☐ ☐)
100 120 140 150 160 其他

Q11: 有無頻閃? PF0.5和PF0.9

A11:



常規商用款式為:
PF0.5無頻閃和PF0.9有頻閃,
工程款式PF大於0.9無頻閃。

(☐ ☐ ☐)
PF0.5 無頻閃 PF0.9 有頻閃 PF0.9 無頻閃

Q12: 是否配應急?

A12:

舊支架內有應急	需提供應急電池品牌型號
新支架	我司可配好應急出貨

(☐ ☐)
配 不配

Q13: 關於保養

A13:

產品保養選擇	常規商用款式保二年, 工程款式保三年, 如電保5年也可以單獨會意15%。
免費保的範圍	1. 製造保期限; 2. 非本公司貨量問題引起的故障和損壞; 3. 非產品本身問題: 由於人為因素及用戶錯誤或不當使用、保管、保養或操作不當造成的故障和損壞; 4. 未可過保可維修: 燈管自然耗損造成的損壞。
超過保費期	1. 超過保費期, 需支付額外的維修費及人工費等; 2. 如寄存在本公司維修, 維修完畢可免費保存貨物一個月, 超過時間我司可額外收取產品價值20%的倉儲費; 3. 過保費期的產品, 本公司有權利不承擔維修義務。

(☐ ☐ ☐ ☐)
1年 2年 3年 5年

A Specifications can be customized 規格參數可度身訂造

- A1. 功率可選: 9-20W + 20-30W + 30-50W +
- A2. 輸出流明可選: 140lm/W + 160lm/W + 180lm/W +
- A3. 色溫可選: 3000K + 4000K + 6500K +
- A4. 顯色度可選: 70Ra + 80Ra + 90Ra +
- A5. LED燈珠可選: 綠明 + 首爾 + 三星 +
- A6. 有無頻閃可選: 有頻閃 + 無頻閃 +
- A7. 燈管轉頭可選: T5轉T8 + T8轉T5 +
- A8. 諧波指數可選: THD<15 + THD>15 +
- A9. 功率因數可選: PF0.5 + PF0.9 +
- A10. 色容差可選: SDCM<3 + SDCM>3 +

B Special projects can be tailor-made 特殊項目可度身訂造

- B1. 防火等級可選: V0 + V1 + V2 +
- B2. 接線方式可選: 單端 + 雙端 + 單雙端 +
- B3. 認證可選: 能源標籤 + 特殊測試 +
- B4. 應急可選: 有應急 + 無應急 +

* The above items can be customized. Please contact us for specific quotation.
Phone: 852-3107 7500 Email: info@eastlike.com

東 櫛 照 明 公 司
EASTLIKE LED COMPANY

Office Address: Room B3, 18/F Bonsun Industrial Building,
364-366 Sha Tsui Road, Tsuen Wan, HongKong

Phone: 852-3107 7500

Fax: 852-3544 0462

Whatsapp: 852-6191 3493

Email: info@eastlike.com